


Made in Italy

**GW 500**  
**TECHNICAL DATA SHEET**

**Specifications**

BENDING MOMENT ( M )	3,26 kNm /m
FACTOR OF SAFETY USED	2
ULTIMATE MOMENT	6,52 kNm/m
SECTION MODULUS - $W_e$	136 cm <sup>3</sup> / m
MOMENT OF INERTIA - $J_y$	676 cm <sup>4</sup> / m
TENSILE MODULUS OF ELASTICITY	2600 MPa
TENSILE STRENGTH	40 MPa
SECTION DEPTH	75 mm
THICKNESS	5 mm
EFFECTIVE SECTION WIDTH	500 mm +/-15
WEIGHT PER LINEAR METER	8.4 Kg
WEIGHT SQUARE METER	16.8 Kg
MATERIAL	WEATHER RESISTENCE uPVC
STANDARD COLOUR	BROWN
TECHNOLOGY	CO-EXTRUSION

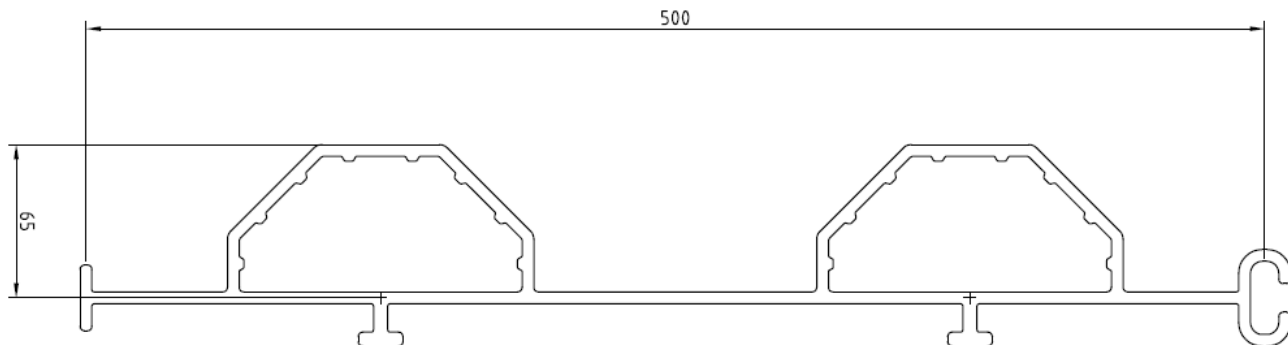

GW 500 can be sold in all the Countries Except : BE-DE-DK-FI-FR-GB-NL-SE-PL